


# GlasRoc™ Sheathing Type X Exterior Wall Fire-Rated Systems

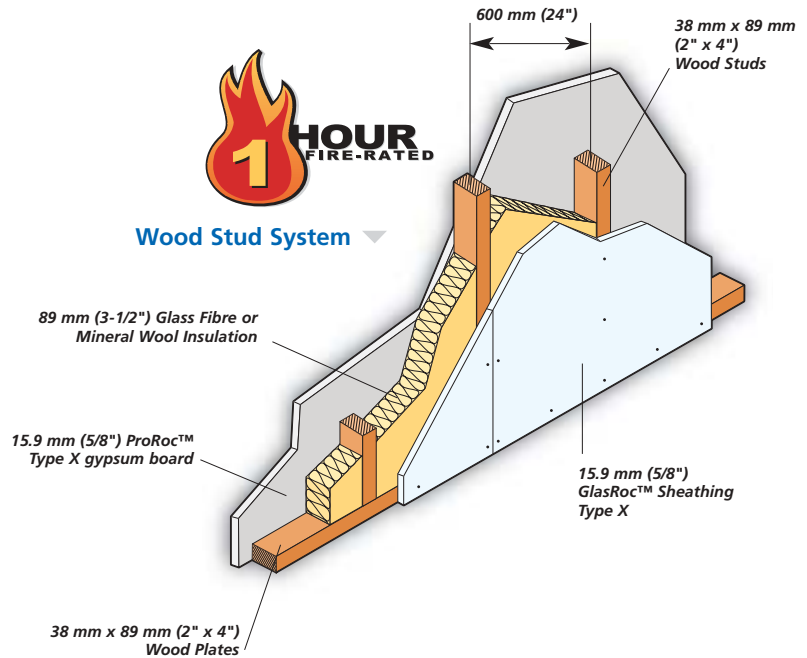

## Reference: UL Design U309

### 1-Hour Fire-Resistance Rating

Cavity thickness..... 89 mm (3-1/2")

Wall thickness..... 121 mm (4-3/4")

Weight..... (34 kg/m<sup>2</sup> (7 psf)

### Interior

Install insulation between studs. Apply one layer of 15.9 mm (5/8") ProRoc™ Type X gypsum board with 48 mm (1-7/8") nails spaced 175 mm (7") o.c. along edges and in the field. Joints must be offset from joints on the opposite side. Tape and finish joints.

### Exterior

Apply one layer of 15.9 mm (5/8") GlasRoc™ Sheathing Type X with 48 mm (1-7/8") nails spaced 175 mm (7") o.c. along edges and in the field. Joints must be offset from joints on the opposite side.