


GlasRoc™ Sheathing Type X Exterior Wall Fire-Rated Systems

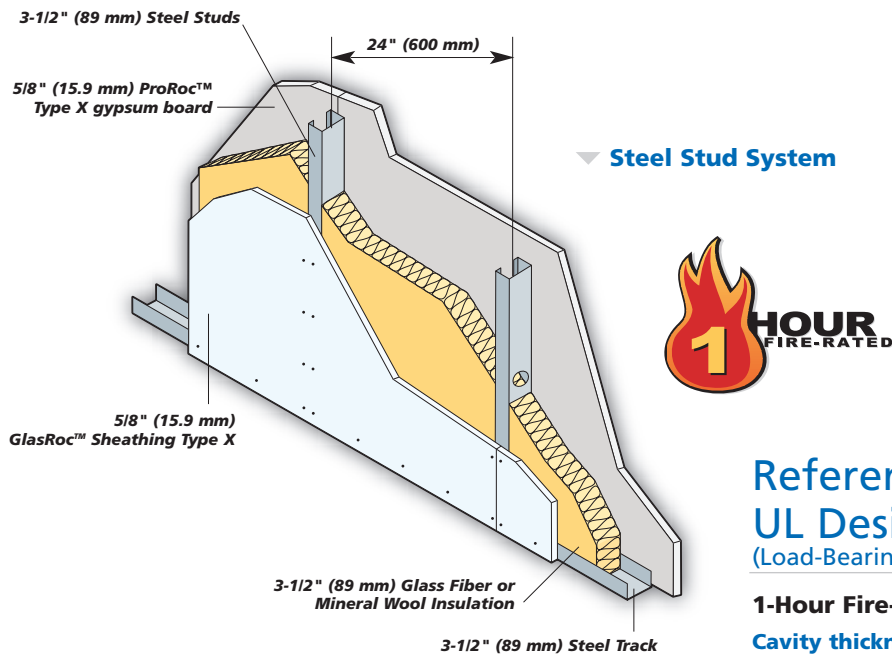

Reference:
UL Design U425
(Load-Bearing)

1-Hour Fire-Resistance Rating

Cavity thickness 3-1/2" (89 mm)
Wall thickness 4-3/4" (121 mm)
Weight 6 psf (29 kg/m²)

Interior

Install insulation between studs. Apply one layer of 5/8" (15.9 mm) ProRoc™ Type X gypsum board vertically to interior side with 1" (25 mm) Type S-12 steel screws spaced 12" (300 mm) o.c. along edges and in the field. Joints must be offset from joints on the opposite side. Tape and finish joints.

Exterior

Apply one layer of 5/8" (15.9 mm) GlasRoc™ Sheathing Type X vertically to exterior side with 1" (25 mm) screws spaced 12" (300 mm) o.c. along edges and in the field. Joints must be offset from joints on the opposite side.